


## Two-way video supercharger operation Instruction

### 1. Function description of the front panel and buttons:

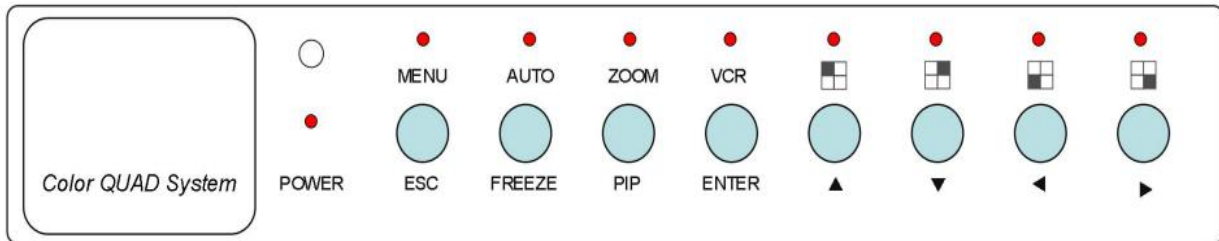

- (1) "MENU" key: full-screen switch between channel 1 and channel 2, as shown in Figure 1
- (2) "AUTO" key: picture-in-picture switch between channel 1 and channel 2, as shown in Figure 2.
- (3) In this state, press the "VCR" key and the small screen moves around the four corners.
- (4) "ZOOM" key: Switch the three two-screen modes, as shown in Figure 3.
- (5) “ / ”Key: Turn off the display of characters 1 and 2 (press other keys again and the characters reappear).
- (6) “ / / ”Keys: Respectively are vertically rotated images; rotate the image horizontally; compress the image up and down, left and right.

### 2. Screen instruction:

Figure 1



Figure 2






Figure 3

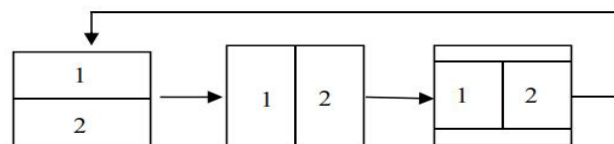

### 3. Back panel:

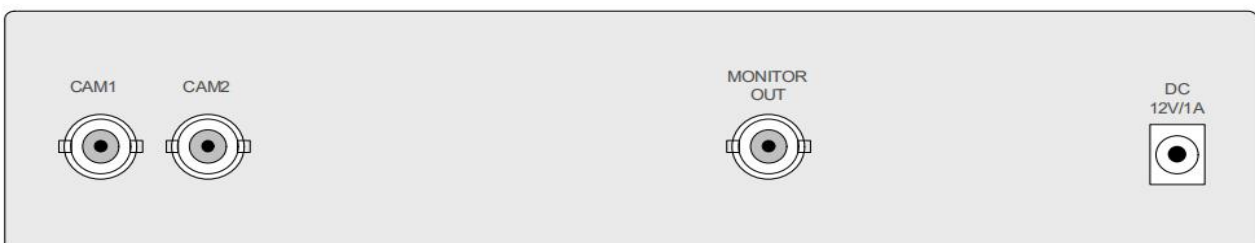

- (1) "CAM1" interface: connects to one video input.
- (2) "CAM2" interface: connects to two video inputs.
- (3) "MONITOR OUT" interface: connects to the video output cable.
- (4) "DC 12V1A" port: 12V1A power port.